


SocketModem® IP

Embedded Modem + Internet Applications




The SocketModem® IP embedded modem creates Internet-ready devices by integrating modem functionality and a complete TCP/IP protocol stack into a single, universal socket design. The space efficient (1" x 2.5"), ready-to-integrate embedded modem sends and receives data via e-mail or socket interfaces. The SocketModem IP embedded modem brings Internet connectivity to any device without adding development time and costs. It also complies with telecom requirements globally allowing for worldwide shipments.

Features

- AT command interface for IP configuration
- Complete data/fax modem solution including the controller, data pump and DAA
- DNS, FTP client, POP3, SMTP, Telnet server, ICMP, IP, TCP/UDP socket communications and PPP protocol support
- PAP and CHAP authentication
- Serial interface supports DTE speeds to 230.4K bps
- TIA-602 AT command compatible in modem mode
- Global approvals with a single communications device design
- Space efficient universal socket connectivity
- Flash memory to update firmware with the latest enhancements
- Two-year warranty

Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

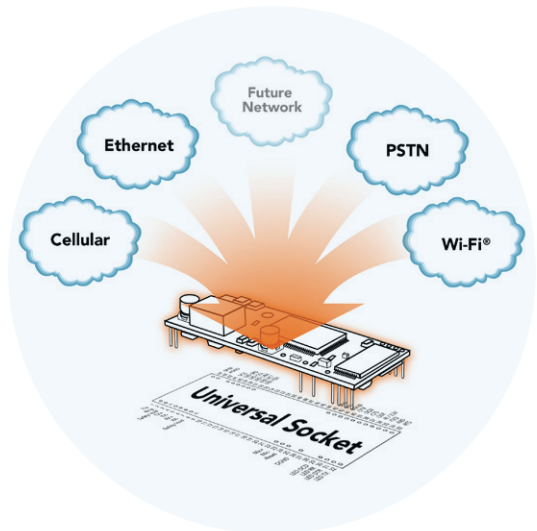


Highlights

Applications. With connect rates from 300 to 56,000 bps, the SocketModem IP embedded modem is ideal for:

- Appliances
- ATM terminals
- Credit card and check verification systems
- Data collection
- Gas pumps
- Industrial and medical remote monitoring systems
- Point-of-sale terminals
- Remote diagnostics
- Remote metering
- Ticketing machines
- Security systems
- Television set-top boxes
- Vending/gaming machines

Internet-enable Any Device. The SocketModem IP embedded modem Internet-enables any device at a minimal cost. Using the embedded Internet protocols, it sends and receives data over the Internet without connecting to a PC or a gateway server.

SocketModem IP Pin-out. SocketModem IP interfaces easily with existing devices through a standard serial interface. A simple programming interface between the device application and SocketModem IP activates the powerful Internet connectivity functions.

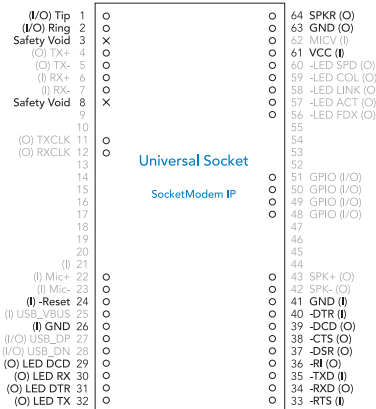

Universal Socket Connectivity.

Multi-Tech's universal socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

Global Compliance. The SocketModem IP embedded modem has successfully completed international compliance testing (homologation) for global approval. This means one communications device can be specified per design without having to integrate specific country approved devices for each system used across the world.

Developer's Kit. The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, wall power adapter, RJ-11 jack, RS-232 cable and Developer Guide CD.

Specifications

Power Requirements

3.3V DC

Power Usage

Typical: 140mA

Maximum: 150mA

Physical Description

2.541" L x 1.045" W x 0.680" H; 0.6 oz.

(6.45 cm x 2.65 cm x 1.7 cm; 0.017 kg.)

Operating Environment

Temperature Range: 0° to +70° C

Approvals

EMC: FCC CFR47 Part 15 (Class B); ICES-003 Canada (Class B); EN 55022 (Class B), EN 55024

Safety: cUL 60950, UL 60950, EN 60950, AS/NZ 60950:2000, CCC

Ordering Information

Product	Description	Region
MT5656SMI-IP-L-92	V.92 Serial Data/Fax + IP	Global

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: SocketModem, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.